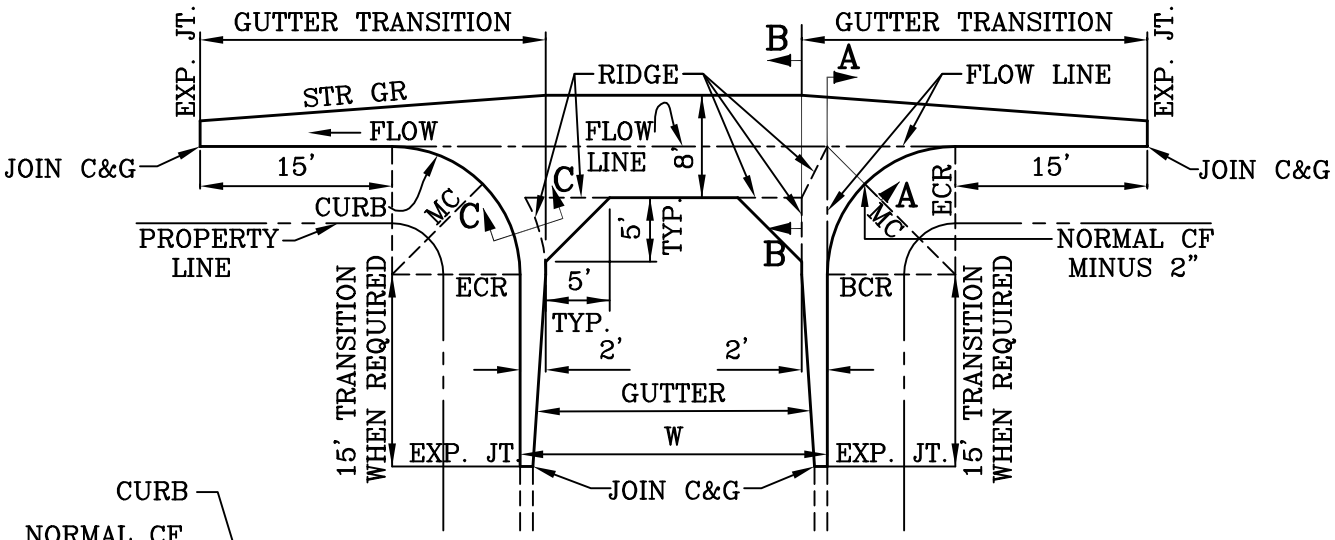

TYPICAL CROSS GUTTER PLAN



SECTION A–A

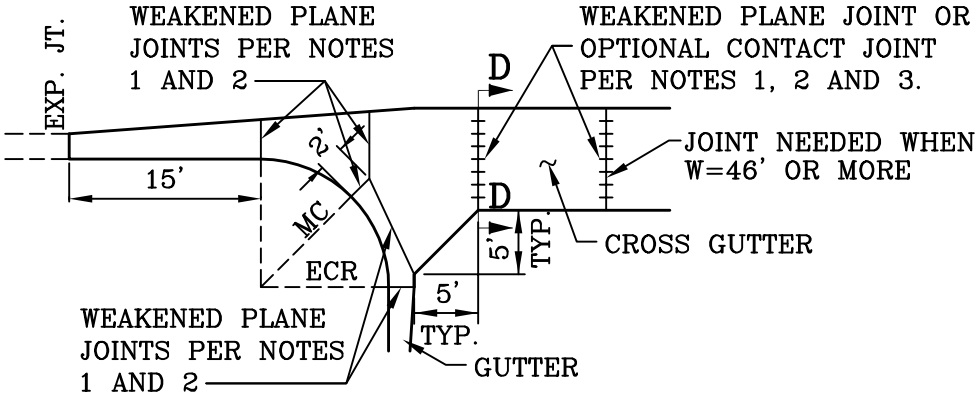

TYPICAL JOINT PLAN



SECTION B–B



SECTION C–C

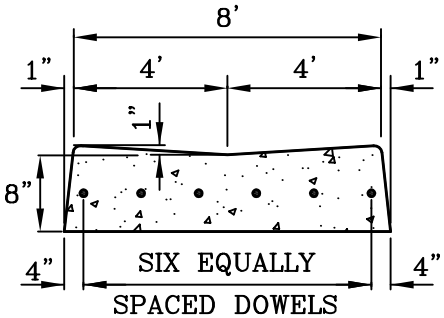

SEE NOTES ON PAGE 2

SECTION D–D

CITY OF MISSION VIEJO

MISSION VIEJO CALIFORNIA 1988	CROSS GUTTER	STANDARD PLAN NO. 319
	APPROVED — RCE 30190 — DATE 9-23-03	SHT 1 OF 2

NOTES:

1. WEAKENED-PLANE AND/OR CONTACT JOINTS SHALL BE PLACED IN CURB AND GUTTER AT LOCATIONS SHOWN ON THE TYPICAL JOINT PLAN SHEET 1.

2. WEAKENED-PLANE JOINTS SHALL BE PLASTIC CONTROL JOINTS OR 1-1/2" DEEP SAW CUTS. CONCRETE SAWING SHALL TAKE PLACE WITHIN 24 HOURS AFTER CONCRETE IS PLACED.

3. DOWELS FOR CONTACT JOINTS SHALL BE NO. 4 BARS 18 INCHES LONG.

4. PLACE A WEAKENED-PLANE OR CONTACT JOINT WHERE LONGITUDINAL ALLEY GUTTER JOINS CONCRETE ALLEY INTERSECTION.

5. ALL EXPOSED CORNERS ON P.C.C. GUTTERS TO BE ROUNDED WITH 1/2" RADIUS.

6. CONCRETE SHALL BE INTEGRAL WITH CURB UNLESS OTHERWISE SPECIFIED.

7. PLACE 6" MIN. THICK A.B. UNDER CROSS GUTTER AND SPANDRELS.

CITY OF MISSION VIEJO

CROSS GUTTER

STANDARD PLAN NO.

319

Ron Henderson 9-23-03

APPROVED RCE 30190 DATE

SHT 2 OF 2