



8' MIN. SPACING
FOR VEHICLE ACCESS

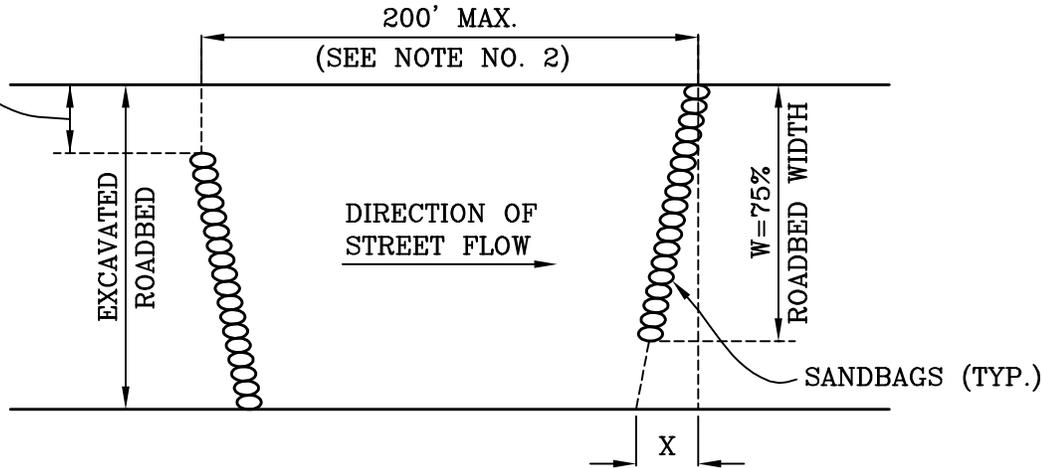

PLAN

W	X
20'-30'	5'
31'-40'	7'
41'-50'	9'
51'-60'	10.5'
61'-70'	12'

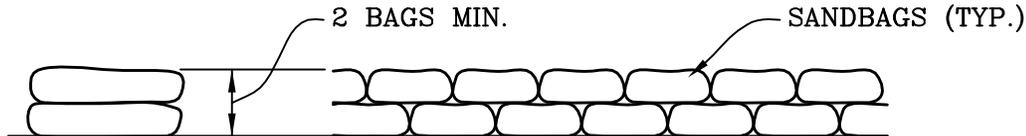

TYPICAL SECTION

TYPICAL ELEVATION

NOTES:

1. GRAVEL BAGS ARE ENCOURAGED OVER THE USE OF SANDBAGS AND MAY BE REQUIRED IN AREAS WHICH ARE PARTICULARLY SENSITIVE TO SEDIMENT DEPOSITION.
2. REQUIREMENTS FOR AND SPACING OF VELOCITY REDUCERS FOR STREETS WITH GRADES OF LESS THAN 4% SHALL BE AS SHOWN ON THE APPROVED EROSION CONTROL PLAN.
3. THIS STANDARD DETAIL SHALL BE USED AS SHOWN ON THE APPROVED EROSION CONTROL PLAN.

CITY OF MISSION VIEJO

STREET CHEVRON
VELOCITY REDUCER

STANDARD
PLAN NO.

452



Robert Anderson

9-23-03

APPROVED

RCE 30190

DATE

SHT 1 OF 1